

# TYPICAL GROUND ASSEMBLY

Ground Assembly shown with:



1-1/2 in.  
"C" Type Clamp

2/0 Threaded Ferrule

Orange Salcor  
Strain Relief

2/0 Yellow  
Cable

Consult your Reliable  
representative for available  
grounding options.

## HOW TO ORDER A GROUNDING SET

Proper selection of each part of a grounding set is important in filling the requirements of your application:

### 1. Clamps

ASTM designation for Type, Class, and Grade.  
Clamp Style ("C" Type, Duck Bill, Flat, or Bus)  
Clamp Size. (min. & max. capacity)  
Manner of Application (Glove or Hot Stick)

### 2. Ferrules

Size - Must match required Ground Cable  
Material - Copper or Aluminum.  
Plain or Threaded - Match clamp selection

### 3. Cable

Length required to reach application distances.


### 4. Shrink Tubing or Strain Relief

**ASTM Type I** with black or yellow elastomer jackets for temperatures from -40° F (-40° C) through +194° F (+90° C).

**ASTM Type III** with clear thermoplastic jacket for temperatures from +14° F (-10° C) through +140° F (+60°) should be used only in well-ventilated areas. This translucent option recommended for stress relief and inspection of cable



92 Steamwhistle Drive • Ivyland, PA 18974  
Phone: 800-966-3530 Fax: 215-357-9193  
Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)



# RELIABLE EQUIPMENT & SERVICE CO., INC.

92 Steamwhistle Drive • Ivyland, PA 18974 • Phone: 800-966-3530 • Fax: 215-357-9193

GROUNDING CLAMPS AVAILABLE FROM RELIABLE EQUIPMENT



## R-GC-1001 "C" TYPE (THREADED)

Style: Al., Curved, Serrated  
Capacity: .16-2" # 6-3000 KCM ACSR  
Current: 400 RMS Amps / 60 Hz  
ASTM: Class B / Grade 5  
Compare to: (Closest Match)  
Salisbury # 20882  
Chance # C600-2256  
Hastings # 10375



## R-DB-1004 DUCK BILL (P/T)

Style: Al., Smooth  
Capacity: .16-1.1" # 6-795 KCM ACSR  
Current: 400 RMS Amps / 60 Hz  
ASTM: Class A / Grade 5  
Compare to: (Closest Match)  
Salisbury # 24404  
Chance # G3622-1  
Hastings # 10478



## R-GC-1002 "C" TYPE (THREADED)

Style: Al., Flat, Serrated  
Capacity: .16-1.5" # 6-1431 KCMACSR  
Current: 400 RMS Amps / 60 Hz  
ASTM: Class B / Grade 5  
Compare to: (Closest Match)  
Salisbury # 1895  
Chance # T600-2708  
Hastings # 21575



## R-DB-1005 DUCK BILL (THREADED)

Style: Al., Smooth  
Capacity: .16-1.1" # 6-795 KCM ACSR  
Current: 400 RMS Amps / 60 Hz  
ASTM: Class A / Grade 5  
Compare to: (Closest Match)  
Salisbury #21030  
Chance # C600-1734  
Hastings # 10476



## R-FC-1007 FLAT (THREADED)

Style: Al., Flat, Serrated  
Capacity: .06-1.5" Flat or Square  
Current: 400 RMS Amps / 60 Hz  
ASTM: Class B / Grade 5  
Compare to: (Closest Match)  
Salisbury # 4345



## R-DB-1003 DUCK BILL (THREADED)

Style: Al., Serrated  
Capacity: .16-1.65" # 6-1590 MCMACSR  
Current: 400 RMS Amps / 60 Hz  
ASTM: Class B / Grade 5  
Compare to: (Closest Match)  
Salisbury # 1853  
Chance # C600-0197  
Hastings # 10477



## R-FC-1006 FLAT (THREADED)


Style: Bronze, Flat, Serrated  
Capacity: .06-1.5" Flat or Square  
Current: 300 RMS Amps / 60 Hz  
ASTM: Class B / Grade 3  
Compare to: (Closest Match)  
Salisbury # 1814  
Chance # C600-2231  
Hastings # 21608



## R-GR-PS GROUND PARKING STUD

Style: Bronze  
Compare to: (Closest Match)  
Salisbury # 21754  
Chance # G3627  
Hastings # 13210


Consult your Inside Sales Representative for Availability and Custom Assembly



# RELIABLE EQUIPMENT & SERVICE CO., INC.


92 Steamwhistle Drive • Ivyland, PA 18974 • Phone: 800-966-3530 • Fax: 215-357-9193

## PLAIN (P/T) GROUNDING FERRULES #2 - 4/0

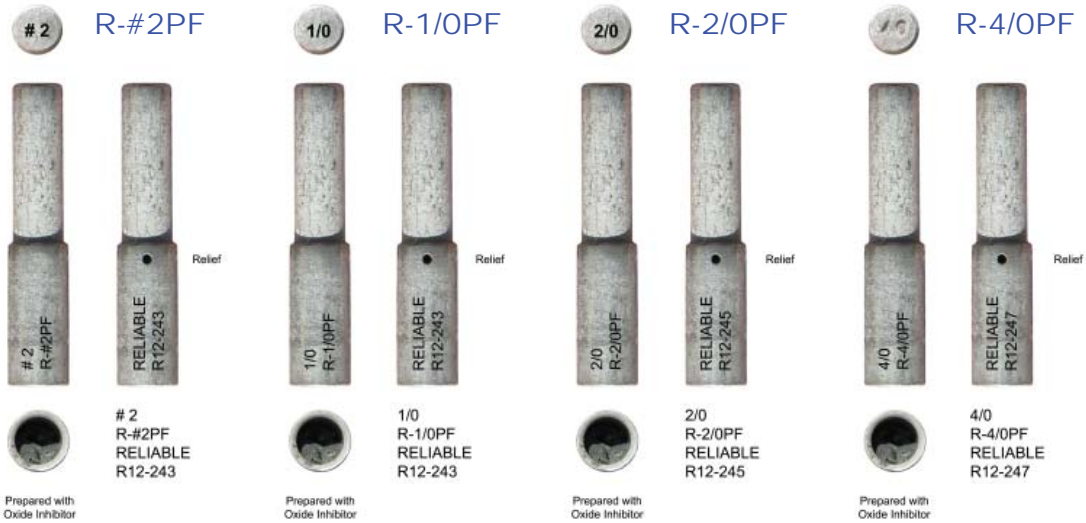

Salisbury	#2	24420	1/0	24421	2/0	24422	4/0	24423
Chance		C600-2610		C600-2611		C600-2612		C600-2613
Hastings		P30244		P30245		P30246		P30247

## THREADED GROUNDING FERRULES #2 - 4/0

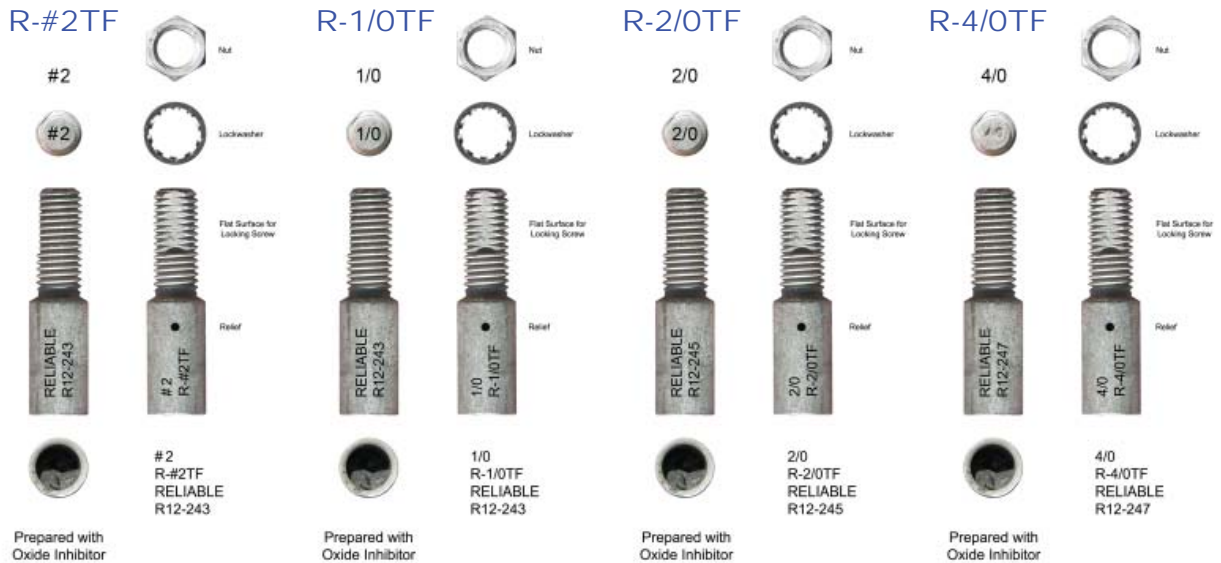

Salisbury	#2	2022	1/0	2023	2/0	2024	4/0	2025
Chance		C600-2602		C600-2603		C600-2604		C600-2605
Hastings		12998		12999		13000		13001

Consult your Inside Sales Representative for Availability and Custom Assembly