




RELIABLE EQUIPMENT & SERVICE CO., INC.

Weight: 16.5 lb.
Length: 17.5 in.
Width: 6.5 in.

Head opens for cable insertion along the line

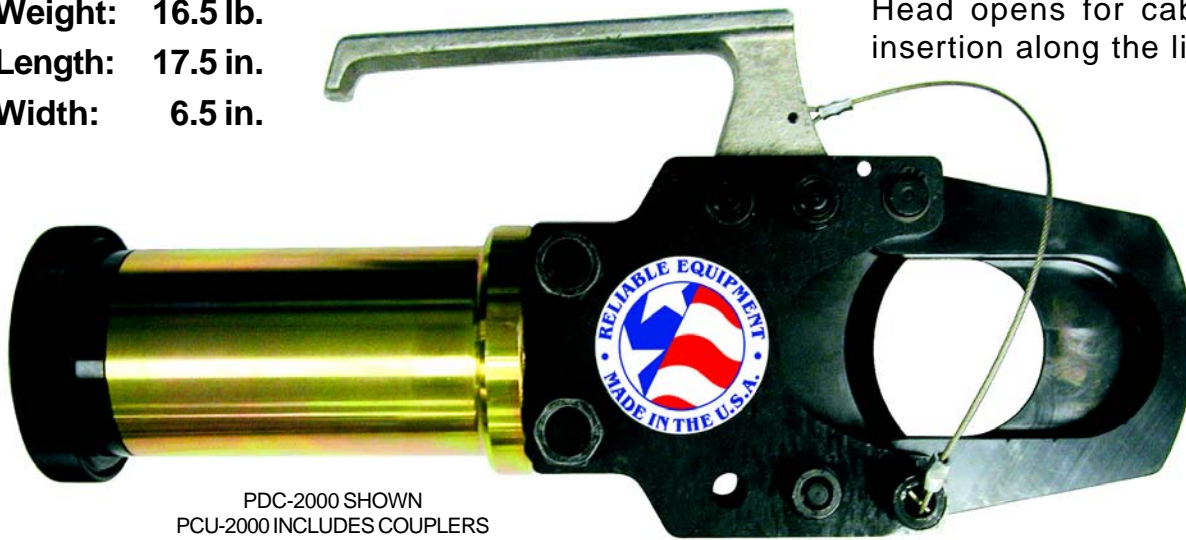

PDC-2000 SHOWN
 PCU-2000 INCLUDES COUPLERS

2000 SERIES



DOUBLE ACTING HYDRAULIC CUTTING TOOL

This guillotine style cutter features up to a 2 inch cutting capacity, 360° rotating head, and a built-in auxiliary handle.

These cutters can be used for cutting cable, wire rope, soft steel bolts, guy strand, ground rods, anchor bolts, and rebar.

The PDC-2000 makes a straight, clean cut every time.

2000 SERIES - MAXIMUM CONDUCTOR CAPACITY

System	Double-Acting
Capacity (Jaw Opening)	2 inch.
Force @ 10,000 psi (690 bar)	28,048 lb.
Return @ 5,000 psi (345 bar)	10,445 lb.
Max Operating Pressure	10,000 psi (690 bar)
Max Return Pressure	5,000 psi (345 bar)
Couplers	Direct Connect

Soft Copper Jacket	2"
Aluminum Jacket	2"
Lead Sheathed Cable	2"
Communication Cable	2"
ACSR	2"
Wire Rope	1"
Soft Steel Bolts	7/8"
Guy Strand	3/4"
Ground Rod	3/4"
Anchor Bolts	3/4"
Rebar Grade 40	3/4"



RELIABLE EQUIPMENT & SERVICE CO., INC.

Weight: 16.5 lb.
Length: 17.5 in.
Width: 6.5 in.

Head opens for cable insertion along the line.



REL-2000SA

DOUBLE ACTING HYDRAULIC CUTTING TOOL

This guillotine style cutter features up to a 2 inch cutting capacity, 360° rotating head, and a built-in auxiliary handle.

These cutters can be used for cutting cable, wire rope, soft steel bolts, guy strand, ground rods, anchor bolts, and rebar.

The **REL-2000SA**

System	Double-Acting
Capacity (Jaw Opening)	2 inch.
Force @ 10,000 psi (690 bar)	28,048 lb.
Max Operating Pressure	10,000 psi (690 bar)
High Pressure Couplers	Female Screw Type

2000 SERIES - MAXIMUM CONDUCTOR CAPACITY

Soft Copper Jacket	2"
Aluminum Jacket	2"
Lead Sheathed Cable	2"
Communication Cable	2"
ACSR	2"
Wire Rope	1"
Soft Steel Bolts	7/8"
Guy Strand	3/4"
Ground Rod	3/4"
Anchor Bolts	3/4"
Rebar Grade 40	3/4"



92 Steamwhistle Drive • Ivyland, PA 18974
 Phone: 800-966-3530 • Fax: 215-357-9193
 Visit us on the web at www.Reliable-Equip.com