


# RELIABLE EQUIPMENT & SERVICE CO., INC.

## REL-58MC

### MANUAL HYDRAULIC CUTTING TOOL

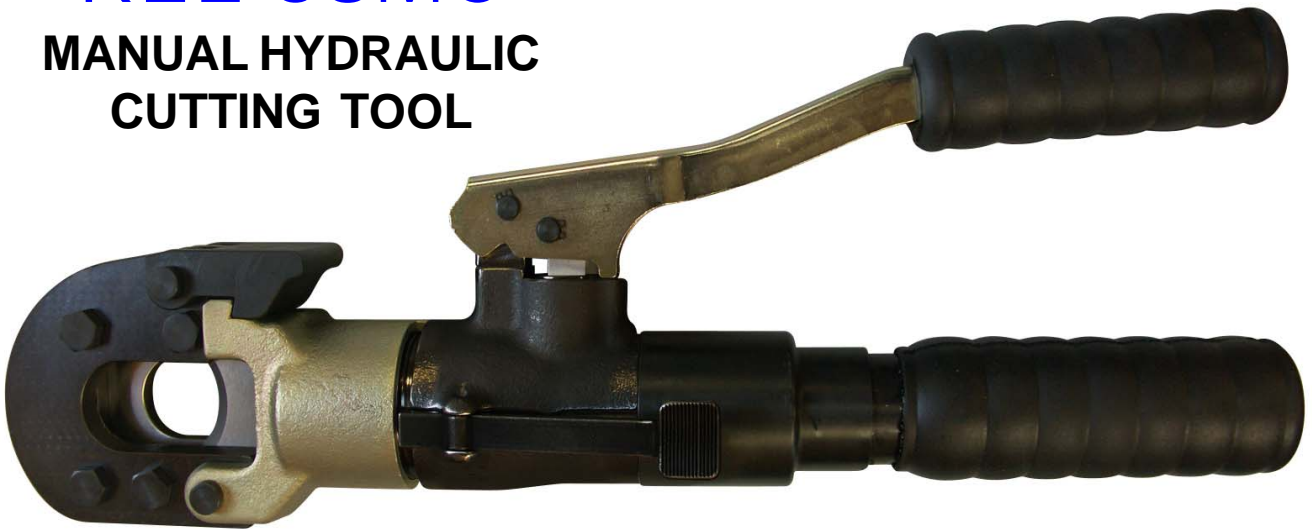

**6 TONS OF CUTTING FORCE**



## REL-58MC

### MANUAL HYDRAULIC CUTTER

Among the smallest hydraulic cutting tools available. Designed to cut copper, aldreyl, aluminum, aluminum-steel cables, EHS guy wire and steel ropes having a max overall diameter of 1" and steel ground rod up to 5/8". The tool features a double speed action.

The blades are manufactured from high strength special steel, heat treated to ensure a long service life.

The head can rotate by 180 degrees, to enable the operator to work in the most comfortable position, and can easily be opened to allow the cutting of running cables. REL-58MC features an automatic safety valve to bypass oil when reaching maximum pressure; a pressure release device can also be operated at any stage of operation.

### SPECIFICATIONS

<b>Length</b>	15.75 inches
<b>Weight</b>	7.7 lbs.
<b>Pressure</b>	10,000 psi (manual)
<b>Capacity</b>	1 in. Al., Guy Wire, Steel Rope
	5/8 in. Steel Ground Rod



## RELIABLE EQUIPMENT & SERVICE CO., INC.

92 Steamwhistle Drive • Ivyland, PA 18974  
Phone: 800-966-3530 • Fax: 215-357-9193  
Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)



# RELIABLE EQUIPMENT & SERVICE CO., INC.

## REL-2000MC MANUAL HYDRAULIC CUTTING TOOL



Weight: 18 lbs.  
Dimensions: 24" x 6" x 4"



## REL-2000MC

### MANUAL HYDRAULIC CUTTING TOOL

This guillotine-type cutter will make a straight, clean cut every time. These cutters can be used for cutting a wide range of electrical conductors. The head opens easily for inserting cable at any location along the line.

Designed to cut copper, aluminum, ACSR, guy wire, soft steel bolts, rebar, ground and anchor rod.

Two-stage pumping piston for rapid advance, and twist handle release.

Magnetic oil reservoir plug traps metal contaminants.

The blades are manufactured from high strength special steel, heat treated to ensure a long service life.

The head can rotate by 360 degrees, enabling the operator to work in the most comfortable position, and can easily be opened to allow the cutting of running cables. REL-2000MC features an automatic safety valve to bypass oil when reaching maximum pressure; a pressure release device can also be operated at any stage of operation.

### CAPACITY

CU & AL WIRE	2"
ACSR	2"
LEAD SHEATHED CABLE	2"
SOFT STEEL BOLTS	1-1/4"
WIRE ROPES	1"
REBAR	3/4"
GROUND & ANCHOR ROD	3/4"
STANDARD GUYWIRE*	3/4"
EHS GUY WIRE	5/8"



**RELIABLE EQUIPMENT  
& SERVICE CO., INC.**

92 Steamwhistle Drive • Ivyland, PA 18974  
Phone: 800-966-3530 • Fax: 215-357-9193  
Visit us on the web at [www.Reliable-Equip.com](http://www.Reliable-Equip.com)