

RELIABLE EQUIPMENT & SERVICE CO., INC.

REL-SP2

2 INCH SUBMERSIBLE HYDRAULIC PUMP

The **REL-SP2** Submersible Pump is a light weight, efficient way to move large quantities of liquids *FAST*.

No priming required!

The **REL-SP2** is also able to pump petroleum products.

The **REL-SP2** is able to run all day without seal damage.

2" Compact, lightweight Submersible Pump
Operate on Open and closed center systems.
X-Long carry handle aids in placement.

High impact strainer housing.

Whip set and flush-face couplers included.

Can run dry without damage.

Specifications

Capacity: Up to 275 GPM

Flow Range: 5-8 GPM

Operating Pressure: 1200-2000 PSI

Intake Port: 1 15/16" (49mm)

Discharge Port: 2" NPFT (51mm)

Height: 14" (over handle)

Width: 8-1/2" x 9-1/2" diameter

Weight: 15 lbs.




RELIABLE EQUIPMENT & SERVICE CO., INC.

92 STEAMWHISTLE DRIVE • IVYLAND, PA 18974

TOLL FREE: 800-966-3530 • FAX: 215-357-9193

Visit us on the web at www.Reliable-Equip.com




RELIABLE EQUIPMENT & SERVICE CO., INC.

REL-SP2

2 INCH HYDRAULIC SUBMERSIBLE PUMP

The graph below illustrates discharge volume and head with relation to hydraulic flow.

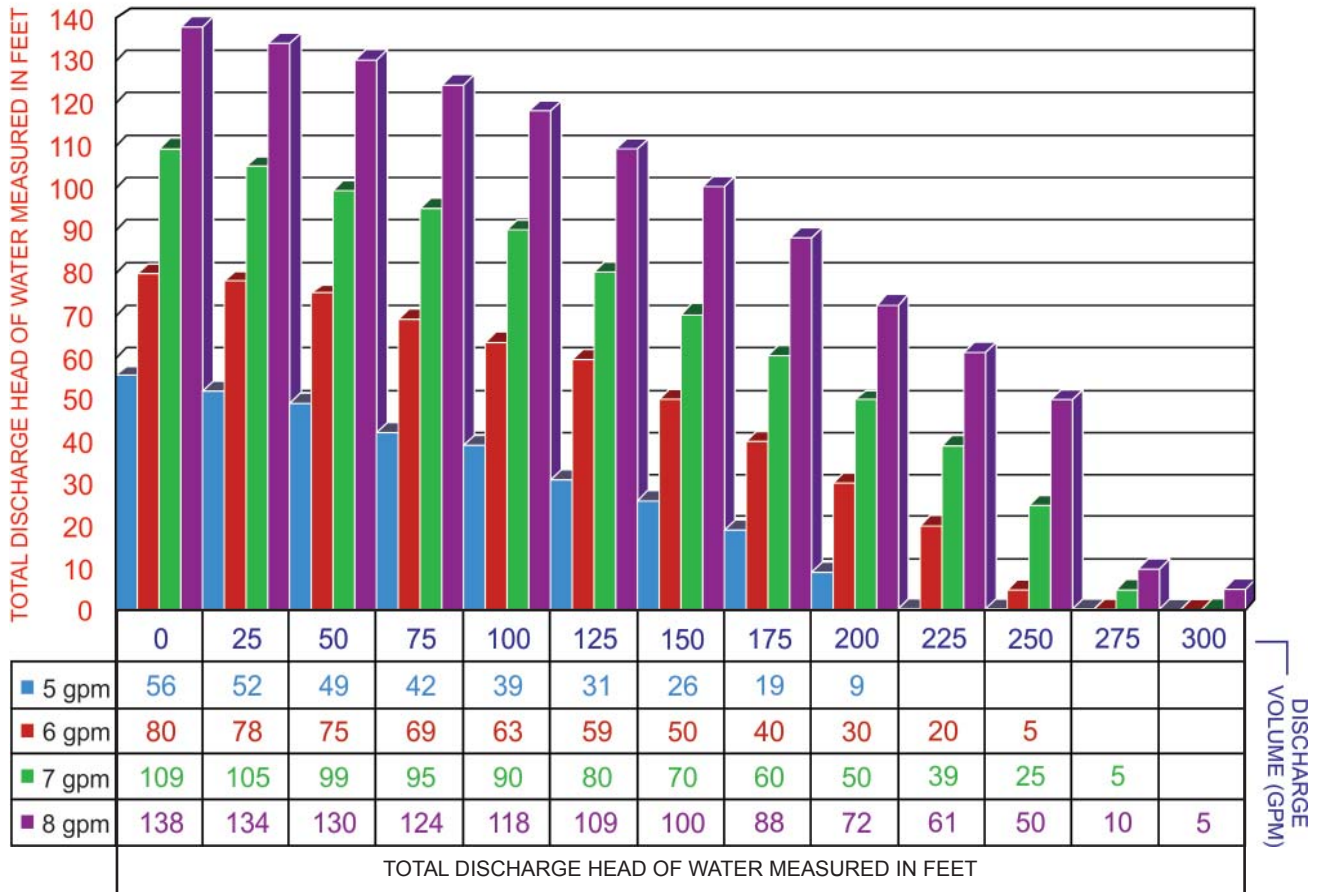

The test above was conducted using a regulated hydraulic source and a fixed discharge assembly.

Results may vary under field conditions.


Contact your **RELIABLE** representative for literature about the **REL-HPU-2000** 2,000 psi hydraulic power unit and the **REL-TP3** 3 inch Hydraulic Trash Pump.



RELIABLE EQUIPMENT

USED WITH CONFIDENCE AROUND THE WORLD

RELIABLE EQUIPMENT & SERVICE CO., INC.
 92 Steamwhistle Drive • Ivyland, P A 18974
 Phone: 800-966-3530 • Fax: 215-357-9193
 Visit us on the web at www.Reliable-Equip.com



RELIABLE EQUIPMENT & SERVICE CO., INC.

REL-SP3-500

3 INCH SUBMERSIBLE HYDRAULIC PUMP

The **REL-SP3** Submersible Pump is a light weight, efficient way to move large quantities of liquids *FAST*.

No priming required!

The **REL-SP3** is also able to pump petroleum products.

The **REL-SP3** is able to run all day without seal damage.

3" Compact, lightweight Submersible Pump
Operate on Open and Closed Center systems.

X-Long carry handle aids in placement.

High impact strainer housing.

Whip set and flush-face couplers included.

Can run dry without damage.

Specifications

Capacity: Up to 500 GPM

Flow Range: 5-8 GPM

Operating Pressure: 1200-2000 PSI

Intake Port: 1 15/16" (49mm)

Discharge Port: 3" NPFT (51mm)


Height: 19" (over handle)

Width: 9-1/2" x 11-1/2" diameter

Weight: 17 lbs.



RELIABLE EQUIPMENT & SERVICE CO., INC.
92 STEAMWHISTLE DRIVE • IVYLAND, PA 18974
TOLL FREE: 800-966-3530 • FAX: 215-357-9193
Visit us on the web at www.Reliable-Equip.com




RELIABLE EQUIPMENT & SERVICE CO., INC.

REL-SP3

3 INCH HYDRAULIC SUBMERSIBLE PUMP

The graph below illustrates discharge volume and head with relation to hydraulic flow.

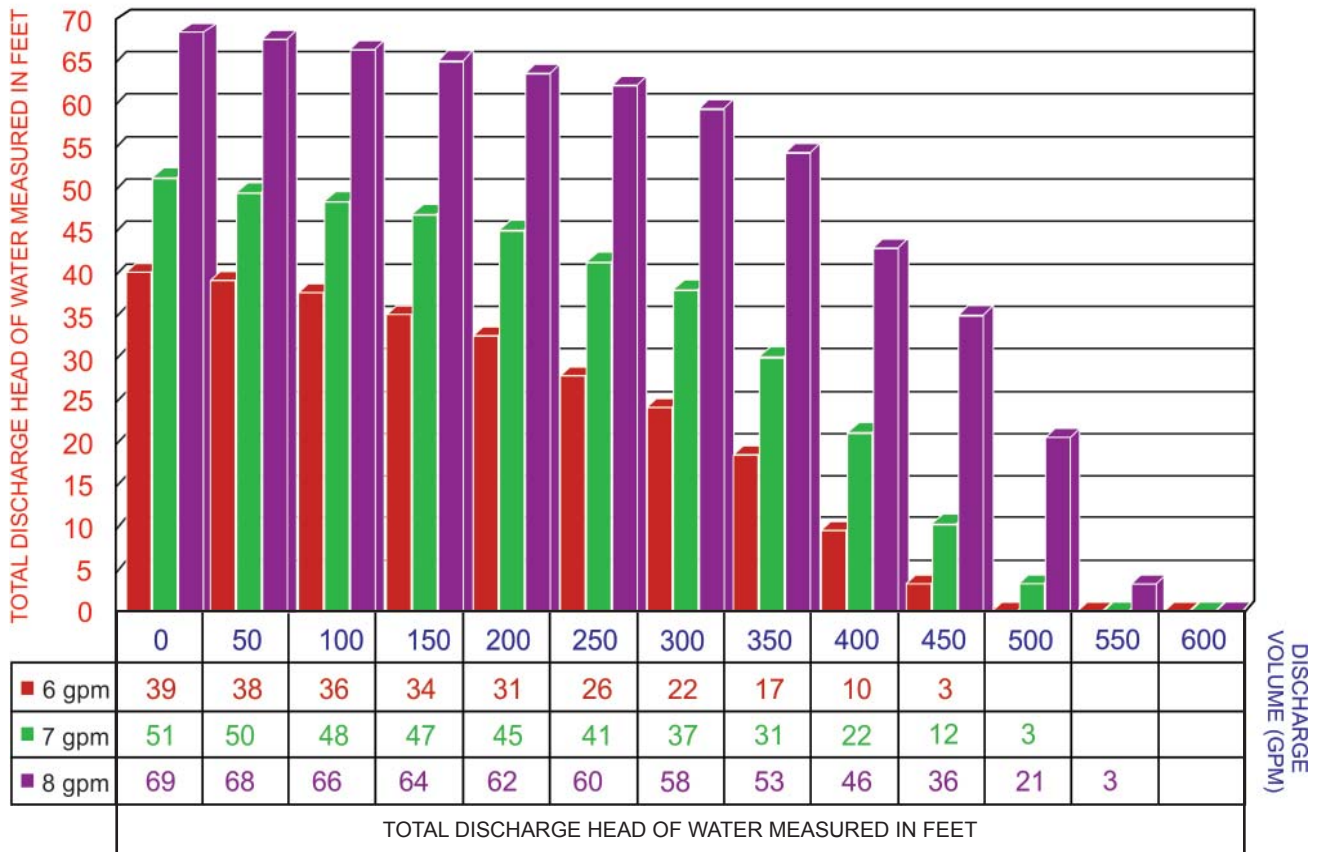

The test above was conducted using a regulated hydraulic source and a fixed discharge assembly.

Results may vary under field conditions.

Contact your **RELIABLE** representative for literature about the **REL-HPU-2000** 2,000 psi hydraulic power unit and the **REL-TP3** 3 inch Hydraulic Trash Pump.



RELIABLE EQUIPMENT

USED WITH CONFIDENCE AROUND THE WORLD

RELIABLE EQUIPMENT & SERVICE CO., INC.

92 Steamwhistle Drive • Ivyland, P A 18974

Phone: 800-966-3530 • Fax: 215-357-9193

Visit us on the web at www.Reliable-Equip.com