




ST2037

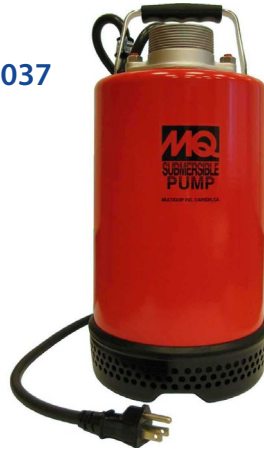

### ST2037

**2 Inch Discharge, 115V 1Ø, 1.0 HP, 73 GPM, 37' Total Head**

This submersible centrifugal pump is ideal in confined area applications. Incorporates a rugged cast aluminum housing, dual shaft seals, and sealed ball bearings impeller.

**Model ST2037F** provides a tethered industrial mechanical float switch assembly.

- 25' power cable with strain relief
- Built-in Overload Protection
- 2" (NPT) Female Discharge Port
- Pumps Liquid Up To 120° F
- Dewateres Flat Surfaces Up To 1/2" Levels



ST2040T

### ST2040T

**2 Inch Discharge, 115V 1Ø, 1.0 HP, 79 GPM, 40 ft Total Head**

This submersible trash pump is ideal for moving water with debris (Maximum size - 1" solids).

The ST2040T incorporates dual shaft seals, sealed ball bearings impeller, and easy impeller clean-out.

**Model ST2040TF** provides a tethered industrial mechanical float switch assembly.

- 25' power cable with strain relief
- Built-in Overload Protection
- Pumps Liquid Up To 120° F
- Heavy-duty Cast Iron Housing construction
- Cast Iron impeller with Neoprene Rubber overlay
- Dewateres Flat Surfaces Up To 2" Levels
- Carrying handle



QP303H

### QP303H - 4.8 HP Honda GX160 Gasoline Engine 3" Suction, Centrifugal Pump, 245 GPM, 98 ft. MAX Head

Clear water applications with limited solids up to 10% of solids with a maximum solid size of 1/4 of the diameter of the pump ports.

- Discharge port easily rotates 180° for hose orientation
- Engine oil-alert protects the engine in the case of low oil
- Aluminum body with cast-iron fittings
- Tubular Steel frame for transportation & pump protection
- Cast Iron impeller & volute for abrasion resistance/long life
- Optional Wheel Kit for ease of transportation (Part#: UWK)

MODEL	ST2037	ST2040T	QP303H	QPT305SLT
Suction x Discharge	2 in. x 2 in.	2 in. x 2 in.	3 in. x 3 in.	3 in. x 1.5, 1 in.
Max. Water Capacity	73 gpm	79 gpm	245 gpm	145 gpm
Max. Lift			25 ft.	25 ft.
Max. Head			98 ft.	328 ft.
Max. Pressure			42.4 psi	142 psi
Fuel Tank Capacity			3.8 qt.	6.3 qt.
Dimension (L x W x H)			21.3 in. x 14.3 in. x 18 in.	28 in. x 20.5 in. x 23.8 in.
Weight			77 lbs.	110 lbs.

## REL-SP2 & REL-SP3

### SUBMERSIBLE HYDRAULIC PUMP

These Submersible Pumps are light weight, and efficient to move large quantities of liquids FAST.

## REL-TP3 & REL-TP4

### SUBMERSIBLE HYDRAULIC TRASH PUMP

The RELIABLE **REL-TP-Series** Trash Pumps are lightweight, yet capable of moving high volumes of water, and solids (sand slurries, gravel, and sludge) up to 3 inches (75 mm) in diameter and 30% by volume.

These pumps has a history of pumping sand, gravel, concrete, and even mortar slurries without issue.

This unit is capable of pumping over 450 gpm (1,688 lpm) at a 10 ft. (2.54 m) head from any 2,000 psi (HTMA Type II) hydraulic source using only 9 gpm (34 lpm) of hydraulic flow.

Reliable **SP & TP Series Pumps** can be paired with the **REL-HPU-2000** Hydraulic Power Unit to make a Powerful Portable Combo for high volume dewatering and trash pump applications.

**REL-TP4** one of the most productive pumps on the market. This unit is capable of pumping over 875 gpm (3,028 lpm) at a 10 ft. (2.54 m) head from any 2,000 psi (HTMA Type II) hydraulic source using only 9 gpm (34 lpm) of hydraulic flow.

#### FEATURES:

- **No priming required!**
- Lightweight Submersible Pump
- Able to pump petroleum products
- Able to run all day without seal damage
- Compact, lightweight Submersible Pump
- Operate on Open and closed center systems
- SP models - X-Long carry handle aids in placement
- TP models - split grip handle provides a well balanced lift and protection for the hydraulic components
- High impact strainer housing
- Whip set and flush-face couplers included
- Can run dry without damage



SPECIFICATIONS				
MODEL	REL-SP2	REL-SP3	REL-TP3	REL-TP4
Max Capacity	275 GPM	500 GPM	450 GPM	875 GPM
Flow Range	5-8 GPM	5-8 GPM	6-10 GPM	7-10 GPM
Operating Pressure	1200-2000 psi	1200-2000 psi	1500-2000 psi	2,000 psi
Intake Port	1 15/16"	1 15/16"	3 in.	4 in.
Discharge Port	2 in. NPFT	3 in. NPFT	3 in.	4 in.
Weight	15.35 lbs.	17 lbs.	30 lbs.	60 lbs.
Height	14 in.	17 in.	13 in.	16.5 in.
Width	8-1/2" x 9-1/2"	8-1/2" x 9-1/2"	14" x 16"	15" x 19"

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193

WWW.RELIABLE-EQUIP.COM