




*Tooling solutions for the power utility industry.*

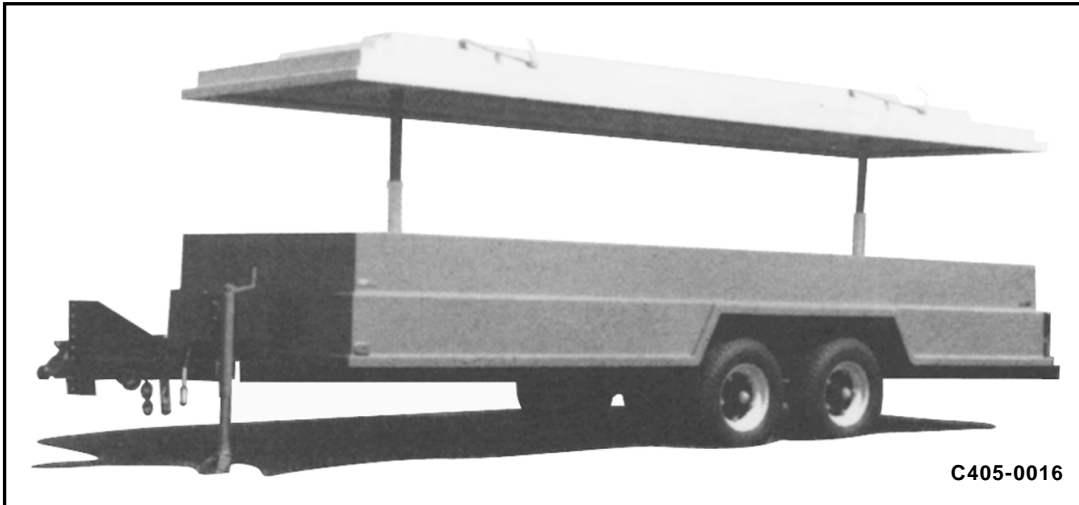

## **FIBERGLASS TRAILER FOR HOT LINE TOOLS** **8,500-lb. payload capacity - Tandem-axle**

Rustproof, lightweight fiberglass with low-profile body extends service life and reduces towing drag. For cargo strength, the complete floor is steel. For full access to interior from all sides, weather-tight lid opens straight up on two telescoping center posts. (Empty Weight 2,600 lb.)

### **STANDARD EQUIPMENT**

#### **Running Gear/Towing Group:**

12,000 lb. GVW tandem-axle/equalizer suspension ´ four 8:00 x 14.5 12-ply tires each rated for 2,790 lb. @ 100 lb. psi ´ fold-up hand-crank jack with castor wheel, adjustable-height pintle-eye hitch ´ two safety chains ´ rear bumper of rectangular-tube steel ´ Break-away with "hot-shot" battery.

#### **Electrical System:**

ATA-approved wiring with ready-to-mount brake-control, seven-conductor cables and socket ´ electric brakes ´ front clearance lights, one each side ´ dual rear lights with tail, stop, back-up and turn-signal functions ´ license plate light.

#### **In-Body Storage:**

12 hot line tool compartments ´ 100 adjustable plastic-covered tool supports ´ 10 elastic tie-down straps ´ One channel rack for 30 Universal Tools accessories.

#### **Solid white (one color) paint.**

#### **Manual crank for lid open/close device**

Smooth-operating sprocket-chain mechanism.

#### **Step-up brackets, front and rear, both sides.**



Channel racks for Universal Tool accessories under lid. Roomy interior with padded supports and stretch tiedowns.

### **OPTIONAL EQUIPMENT**

- ´ Thermostatic-controlled heater (110V or 220V)
- ´ Additional channel rack for 22 Universal accessories
- ´ Ladder-Rack Bracket mounted on lid (plastisol-coated)
- ´ Electric motor for lid Open/Close device
- ´ Socket-type hitch (fits 2-5/16" ball, adj. height)
- ´ Two-tone paint

**TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193**