




Tooling solutions for the power utility industry.

Shrouded Ferrules overlap the grounding cable jacket for stress relief to the terminal. Two crimps secure the ferrule to the bare strands and one crimp applies the jacket.




Unshrouded Ferrules are available with shrink tubing that overlaps the bare cable conductor and jacket for stress relief.

Available factory-installed in pairs on any cable length or as individual units. Ferrules install with a hydraulic crimping tool.




Unshrouded Threaded Aluminum Ferrules For tapped or drilled grounding-clamp terminals. **Clear heat-shrink tubes** provide corrosion-inhibitor by excluding moisture and stress-relief for cable jacket and ferrule-to-stranding connection.

FERRULE WITH HEAT SHRINK TUBE PART #	CABLE SIZE AWG	5" SHRINK TUBING ONLY PART #
C600-1662	#2	P600-1593
C600-1663	1/0	P600-1593
C600-1664	2/0	P600-1593
C600-1665	4/0	P600-1593



Plain-Plug Type Ferrules for Pressure Type Grounding-Clamp Terminals

Application		Unshrouded Copper Ferrules		Shrouded Aluminum Ferrules	
Burndy Die # or Equivalent	Cable Size AWG	Part # '2 Units (Installed)	Part # 1 Unit Ea. (Not Installed)	Part # '2 Units (Installed)	Part # 1 Unit Ea. (Not Installed)
U165	#2	C600-2614A	C600-2614	C600-2614A	C600-2614
U165	1/0	C600-2615A	C600-2615	C600-2614A	C600-2614
U165	2/0	C600-2616A	C600-2616	C600-2614A	C600-2614
U166	4/0	C600-2617A	C600-2617	C600-2614A	C600-2614

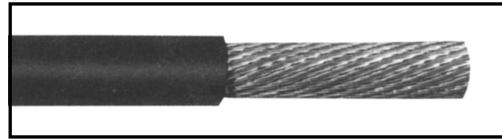

Copper Grounding Cable - Jacketing is smooth abrasion, weather and oil resistant (Meets applicable ASTM Specs). AWG size is marked approximately every 4 feet.

Yellow and black jackets are T-prene rubber compound with a recommended low temperature of -20° F. Clear jackets (allow visual inspection) are UV-inhibited PVC with a recommended low temperature of 0° F. Extra-flexible cables, because of their extra-fine strands, require termination ferrules when used with ground clamps.

Either aluminum or copper ferrules may be used with copper cable.

PART	SIZE AWG	STRAND*	APPROX. WT. (lb./1,000 ft.)
------	----------	---------	-----------------------------

Yellow-Jacket Copper Cable

S6116	2	665	280
S6117	1/0	1045	425
S6118	2/0	1330	520
S6119	4/0	2109	760

Clear-Jacket Copper Cable

S6449	2	665	289
S7568	1/0	1050	520
S6450	2/0	1323	546
S6451	4/0	2107	841

Black-Jacket Copper Cable

S3713	2	665	280
S3715	1/0	1045	425
S3712	2/0	1330	510
S3714	4/0	2109	760

*Varies with manufacturer.