



Tooling solutions for the power utility industry.



IRWIN POLE BITS - TAPER SQUARE SHANK W/ ADAPTER SECTION

- ✓ Single twist type with single spur, cutter and side lip, and a Medium-fast screw pitch.
- ✓ Hollow center twist design for fast, continuous flow of chips
- ✓ Designed to bore through creosoted poles without clogging, binding or stopping to clear chips. Equally efficient for boring large timbers used in heavy construction.
- ✓ Heat-treated full length for extra strength.

IRWIN POLE BIT		8" TWIST				12" OVERALL LENGTH				
SIZE	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"	1-1/16"
Part	-	46509	-	46511	-	46513	-	-	-	-
		12" TWIST				18" OVERALL LENGTH -				
SIZE	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"	1-1/16"
Part	46608	46609	46610	46611	46612	46613	46614	46615	46616	16617
		18" TWIST				24" OVERALL LENGTH				
SIZE	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"	1-1/16"
Part	-	-	-	46711	-	46713	-	-	46716	-

Sizes 11/16" through 1-1/16" have 5/16" hex shanks.



THE FIREBALL - Carbide-Tipped Pole Bits

The double-spur, carbide-tipped, hex-shanked bit has been tested and refined over many years of in-the-field use. THE FIREBALL is specified by many major public utility companies for drilling CCA and creosoted power poles.

THE FIREBALL will outlast and outperform wood boring bits that are not carbide-tipped by a wide margin. The FIREBALL utilizes an especially designed tip configuration that results in faster drilling, and can be resharpened or completely replaced. The hardened lead screw is also replaceable allowing these bits to be completely rebuilt if necessary.

With the 7/16" hex-drive shank these bits can be used in either electric, air, or hydraulic driven impact wrenches. A 1/2" capacity drill motor can also be used. A 1/2" drive impact socket shank is available on request. **Also available in 5/8" Hex.**

FIREBALL		7/16" HEX			8" TWIST		12" OVERALL LENGTH			
SIZE	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"	1-1/16"
Part	-	H70809	-	H70811	-	H70813	-	H70815	-	H70817
		7/16" HEX 12" TWIST			16" OVERALL LENGTH					
SIZE	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"	1-1/16"
Part	-	H71209	-	H71211	-	H71213	-	H71215	-	H71217
		7/16" HEX 18" TWIST			22" OVERALL LENGTH					
SIZE	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"	1-1/16"
Part	-	H71809	-	H71811	-	H71813	-	H71815	-	H71817



TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193






Tooling solutions for the power utility industry.

RELIABLE EQUIPMENT - POLE BITS

Hollow center twist design, single spur cutter and side lip for fast continuous flow of chips.

			
IMPACT 18" OVERALL LENGTH 12" TWIST - 7/16" HEX		IMPACT 18" OVERALL LENGTH 12" TWIST - 5/8" HEX	
47909	9/16"	48109	9/16"
47911	11/16"	48111	11/16"
47913	13/16"	48113	13/16"
47915	15/16"	48117	1-1/16"

			
GAS DRILL 17" OVERALL LENGTH 12" TWIST		BIT BRACE 18" OVERALL LENGTH 12" TWIST	
47309	9/16"	47109	9/16"
47311	11/16"	47111	11/16"
47313	13/16"	47113	13/16"
47315	15/16"	47115	15/16"
47317	1-1/16"	47117	1-1/16"

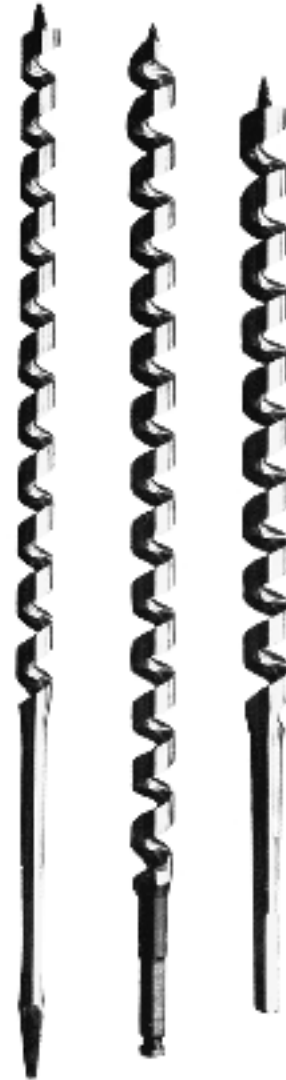

POLE STEP DRIVER

PSD-2-7/16", OR PSD-2-5/8"

Heavy-duty construction permits faster driving and extraction of pole steps. Heat-treated, high tensile steel, for use in impact wrench.

"J" HOOK PULLER

BJH-1-7/16", OR BJH-1-5/8"

For easy installation and removal of "J" Hooks. Made of heat-treated, high tensile steel, for use in impact wrench.

We maintain complete inventories to assure you prompt delivery. For further information on these and other products, please contact our sales department.



POLE STEP DRIVER



"J" HOOK PULLER