





Tooling solutions for the power utility industry.



Controller can be mounted on wood poles with a simple lag screw or non-wood poles with the adjustable chain tightener.

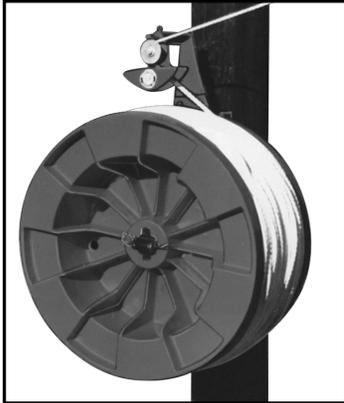

S-75-WA



S-75-EA



6,000 ft. Polemaster with Nylon Web Binder Suspension.



3,000 ft. Polemaster w/ Optional Chain Binder Suspension.

SHERMAN & REILLY - SPIDER II SYSTEM

The Spider System consists of a positive breaking controller and a storage reel of rope which mount on the lead pole at any desired height.

When the pulling line is ready to be installed, the storage reel can be mounted on a pole mounted winch or line truck winch using S&R adapters. This allows the storage reel to re-wind the pilot line, thus "hauling in" the pulling line under tension.

The brake on the controller permits the storage reel to pay out the pilot line when the rope is pulled and engages when the rope is slack. This eliminates "back-winding" and holds tension during the installation of the pilot line.

ROPE for the Spider System is available in 3/8" dia. #12 braided polypropylene Spider Rope or 5/16" dia. polyester over polyolefin Spiderflex Rope. Either is available in four colors: Black, Blue, Green, or Red.

Part	Description
S-75-C	Spider II - Controller
S-75-SR	Spider II - Storage Reel
S-75-WA	Spider II - Line Truck Winch Adapter
S-75-EA	Spider II - Pole Mounted Winch Adapter

NOTE

Spider storage reels are designed for 3,000 ft. max. of S&R Spider or Spiderflex rope **ONLY**. The max. line tension is not to exceed 300 lbs.

TSE - CONDUCTOR STRINGING EQUIPMENT

POLE MASTER SYSTEM - 3,000 ft. and 6,000 ft.

POLE MOUNTED BRAKE SPINDLE with hot stick adjustable brake controller. The spindle is suspended by Nylon Web Binder or Optional Chain Binder.

ROPE DRUM available in 3,000 ft. or 6,000 ft. rope capacity. The drum is fabricated and galvanized for extended service life.

SYNTHETIC PILOT ROPE (3,000 ft. or 6,000 ft.). The Pilot Rope is available in four different colors: blue, green, orange and yellow for phase identification.

STANDARD ROPE: 3/8" diameter polyester; 1,800 lbs. breaking strength; 8-braid.

OPTIONAL ROPE: 5/16" diameter polyester; 2,600 lbs. breaking strength; 12-braid

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193