



Tooling solutions for the power utility industry.

SHEAVES

Ensley sheaves meet almost every job need. Handle and pull cable faster and more efficiently. Sheaves provide positive control, even on long, difficult pulls. Ensley sheaves minimize the chances of scuffing, kinking, or cutting sheathing and insulation. Ensley cable handling systems pay for themselves.

HOOK TYPE SHEAVES 6,500 LBS. PULLING FORCE

Keep cable bunched together. These sheaves feature a 1" hook opening, bearings with zerk fitting, welded steel frames and aluminum sheaves. The 4-1/2" inside groove is interchangeable with competitive products, but 6-1/2" and 8-1/2" inside groove sheaves are available on special request.

Part - Description	Trade Size	Min. Radius	Actual O.D.	Wt.
E-806 Hook Sheave	6"	1-7/16"	8"	9 lbs.
E-812 Hook Sheave	12"	3-5/16"	10-5/8"	17 lbs.
E-818 Hook Sheave	18"	7"	18-1/4"	30 lbs.
E-824 Hook Sheave	24"	9-13/16"	24"	42 lbs.



E-824




E-818B

BREAKAWAY HOOK TYPE SHEAVES

This style features many advantages over conventional hook type sheaves. The side hinge opens easily to install or remove additional cables. No loose pieces, built-in cable guides prevent cable slipping off sheave and a flat bottom which allows a breakaway sheave to be used as a cross-arm sheave.

Part - Description	Trade Size	Actual O.D.	Wt.
E-806B Breakaway Hk Sheave	6"	6"	15 lbs.
E-812B Breakaway Hk Sheave	12"	10-5/8"	27 lbs.
E-818B Breakaway Hk Sheave	18"	18-1/4"	43 lbs.
E-824B Breakaway Hk Sheave	24"	24"	58 lbs.
E-817BW Breakaway Hk Sheave	34"	34-1/2"	110 lbs.

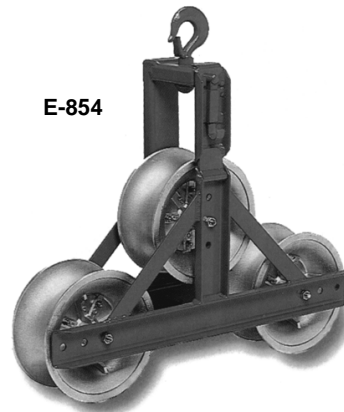

E-854

E-854 - TRIANGLE BREAKAWAY SHEAVE


This sheave features a welded steel frame, aluminum sheave with removable sheave pins, 4-1/2" inside groove, and 6,500 lbs. pulling force.

Dimensions: 40" L x 8" W x 30-1/2" H **Weight:** 60 lbs.

E-861 - RIGHT ANGLE TWINYOKE SHEAVE

This sheave features Steel frames, a 4-1/2" inside groove, Steel hooks, 24" trade size.

Weight: 52 lbs.

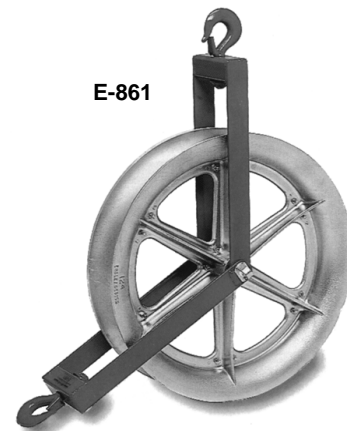

E-861

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193