




Tooling solutions for the power utility industry.

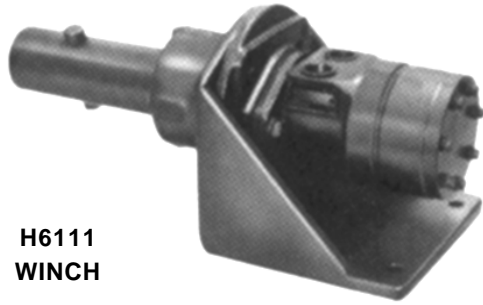

**H6111
WINCH**

H6111 - WINCH

For winding line wire or small diameter cable.
Convertible shaft - changes from 2-7/16" diameter to 1-1/2" diameter to accommodate either bayonet-type collapsible reel or standard capstan drum.
Flat base standard for permanent mount.
Open- and Closed-Center system.

SPECIFICATIONS

Capacity: 375 lb. tension on a 20" diameter reel

Shaft: 2-7/16" diameter sleeve
1-1/2" diameter - main

Flow Range: 4 - 6 gpm

Operating Pressure: 1,000-2,000 psi

Pressure Port Thread: 7/8-14 SAE O-Ring

Return Port Thread: 7/8-14 SAE O-Ring

RPM: 52 @ 4 gpm
68 @ 5 gpm
80 @ 6 gpm

Weight: 41 lb. (less reel)

Length: 17.5 in.

Width: 8 in.

Height: 8 in.



H6101-1 - CAPSTAN HOIST

40 lb. , flat base
For raising or lowering transformers in hard-to-reach areas.
Internal automatic brake.
1,000 lb. capacity
Open- and Closed-Center.
Includes capstan drum.

SPECIFICATIONS

Drum Diameter: 7.5 in.

Flow Range: 4-6 gpm

Operating Pressure: 2,000 psi

Pressure Port Thread: 9/16-18 SAE O-Ring

Return Port Thread: 3/4-16 SAE O-Ring

Weight: 40 lb.

Length: 14 in.

Width: 9.25 in.

Height: 8 in.



**IF YOU DON'T SEE WHAT YOU NEED
CONTACT RELIABLE EQUIPMENT
800-966-3530**

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193