




Tooling solutions for the power utility industry.

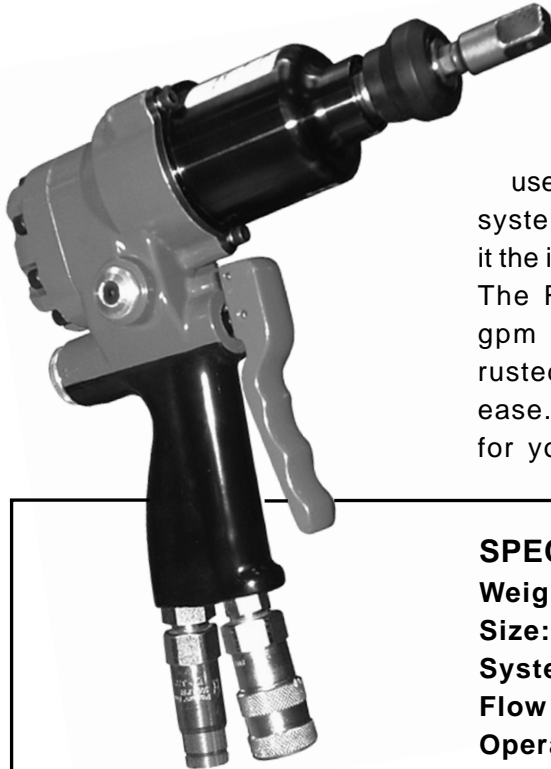

RELIABLE - REL-425 HYDRAULIC IMPACT WRENCH

The REL-425 hydraulic impact wrench was designed with an E-Z selector for use on both open or closed center hydraulic systems. It's lightweight (just 6.3 lbs.), makes it the ideal tool for use on utility pole construction. The REL-425 delivers 425 ft.-lb. torque at 6 gpm making it great for drilling, loosening rusted hardware or tightening lag bolts with ease. A 7/16" quick change chuck is included for your convenience.

SPECIFICATIONS:

Weight: 6.3 lbs.

Size: 8.6" x 8.8" x 2.7"

System: Open or Closed Center

Flow Range: 4 -12 gpm (optimum 5-8 gpm)

Operating Pressure: 1,000-2,000 psi

Torque: 425 ft.-lb. @ 6 gpm

RPM: 3,600 @ 6 gpm

IMPACT WRENCH & DRILL 1/2" DRIVE

Use to tighten nuts, install lag screws, or as a wood drill.


Super Spool™ selector control for use on Open- and Closed-Center hydraulic systems.

Reversible. Rugged gear motor.

Needle bearing motor design for long life.

H6505A 7/16" hex quick change chuck with 1/2" square adapter.

H6505A1 1/2" square drive.

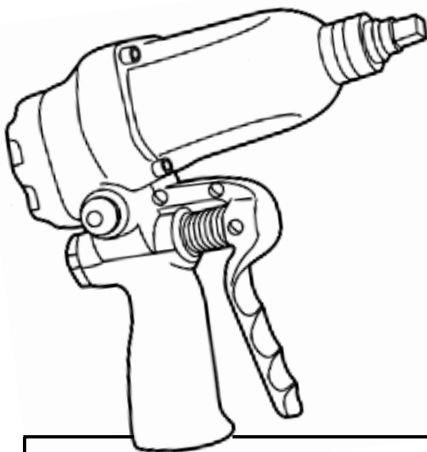

SPECIFICATIONS:

Flow Range: 4-6 gpm

Operating Pressure: 1,000-2,000 psi

Torque: 280 ft.-lb. at 5 gpm

Pressure Port Thread: 9/16-18 SAE O-Ring

Return Port Thread: 3/4-16 SAE O-Ring

RPM: 1,100 rpm @ 5 gpm (no load)

Impacts Per Minute: 2,200 @ 5 gpm

Weight 7 lbs.

Length 10"

Width 3.5"

Height 9"

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193



Tooling solutions for the power utility industry.

H8508 - IMPACT WRENCH & DRILL 1/2" DRIVE

Super Spool™ for Open- and Closed-Center operation. Pressure is controlled internally to offer a 4-12 gpm operating range while preventing overspeed damage. Reversible operation.

High torque for drilling salt cured and creosoted poles. Heat insulated handle, ergonomic design adds comfort. Twin hammer impact mechanism for high performance and reliability.

Well balance for comfortable operation.

- H8508/48330** 7/16" hex quick change chuck
- H8508/48329** 1/2" square drive
- H8508/48755** 7/16" hex quick change chuck, adj. torque
- H8508/48760** Square drive, adjustable torque control




SPECIFICATIONS:	
Operating Pressure: 1,000-2,000 psi	Weight 7.1 lbs.
Flow Range: 4-12 gpm	Length 8.2"
Optimum Flow Range: 5-8 gpm	Width 4.2"
Torque: 400 ft.-lb. at 8 gpm	Height 10.6"
Pressure Port Thread: 3/4-16 SAE O-Ring	
Return Port Thread: 3/4-16 SAE O-Ring	

H8500A - IMPACT WRENCH & DRILL 1/2" DRIVE

Variable torque, 7/16" hex quick change chuck with 1/2" square adapter.

Tighten or loosen nuts, install lag screws, or use as a drill. Variable torque can be adjusted from 80-280 ft.-lbs. Built-in flow control prevents overspeeding, allows flows of up to 12 gpm (45 lpm).

Super Spool™ for Open- and Closed-Center operation. Rugged gear motor. Reversible.

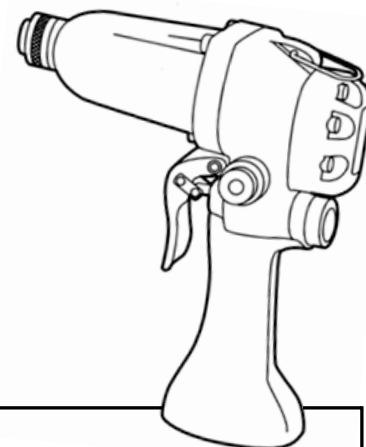

SPECIFICATIONS:	
Operating Pressure: 1,000-2,000 psi	Weight 7.5 lbs.
Flow Range: 5-12 gpm	Length 11"
Torque: 80-280 ft.-lb. at 5 gpm	Width 3"
Pressure Port Thread: 3/4-16 SAE O-Ring	Height 10.75"
Return Port Thread: 3/4-16 SAE O-Ring	
RPM Range: 1-1,200 rpm	
Impacts Per Minute: 2,200 @ 5 gpm	

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193