




Tooling solutions for the power utility industry.

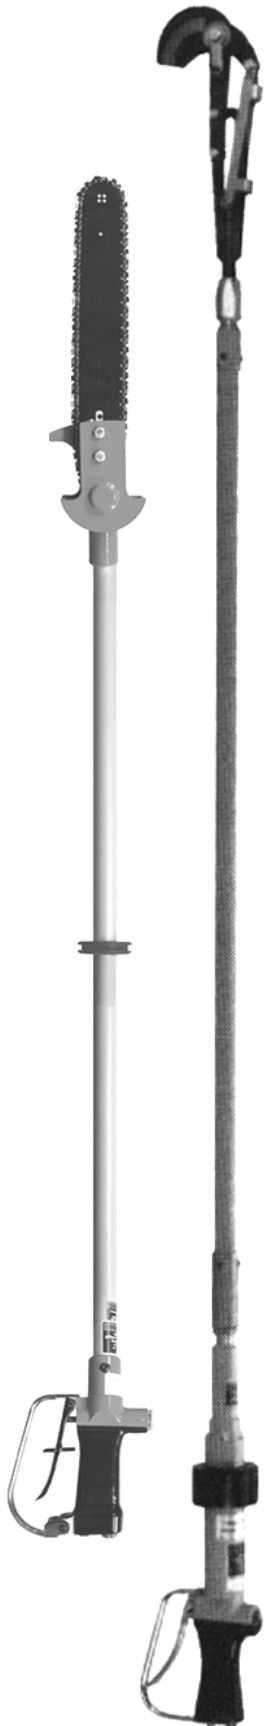

LL4710 UTILITY PRUNERS

Use on utility line clearing and selective pruning of shade trees.

Heavy cut capacity cuts branches up to 2".

Heat-insulated handle with trigger guard.

Full power return.

48520 Utility Pruner, Open-Center

48525 Utility Pruner, Closed-Center

48200 Utility Pruner, Super Sleeve™ for operation with Open- or Closed-Center systems.

SPECIFICATIONS:

Cutting Capacity: 2 in.

Extension Type: Fiberglass

Weight: 48520 and 48525 - 10.7 lbs., 48200 - 12 lbs.

Overall Length: 86 in.

Width: 6-1/4 in.

Flow Range: 4-6 gpm

Operating Pressure: 1,000-2,000 psi

Pressure Port Thread: 3/8" NPTF

Return Port Thread: 3/8" NPTF

CHAIN SAWS - LONG REACH

Cut hard-to-reach branches from aerial basket or the ground.

Super Spool™ selector control for use on Open- and Closed-Center systems.

Insulated fiberglass extension tubes.

Safety features include: two-step trigger, trigger guard, fully covered sprocket guard, and anti-kickback chain.

Automatic chain oiler.

Rugged high torque gear motor.

43178 Long Reach Chain Saw - 62.5 in. overall length

38568 Long Reach Chain Saw - 75.0 in. overall length

43177 Long Reach Chain Saw - 88.5 in. overall length

SPECIFICATIONS:

Cutting Capacity: 13 in.

Weight: 43178 - 8.25 lb., 38568 - 8.75 lb., 43177 - 9 lb.

Flow Range: 5-8 gpm

Operating Pressure: 1,000-2,000 psi

Pressure and Return Port Thread: 3/8" NPTF

Chain Size: .325 in. pitch

Bar Gauge: .058 in.

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193