




Tooling solutions for the power utility industry.




H4665A - COMPACT SUBMERSIBLE PUMP

Open- and Closed-Center Systems.
Compact, lightweight design.
High impact strainer housing.
Up to 275 gpm.
Carrying handle.
Self-priming.
Can run dry without damage.

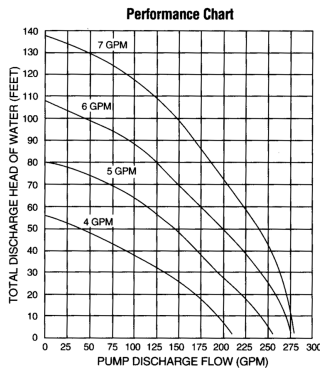


Specifications:

Capacity: Up to 275 gpm (see performance chart).
Intake Port: 1-15/16 in.
Discharge Port: 2 in. NPTF
Strainer: 2-5/8 in. x 5-5/8 in. - 3/8 in. openings.
Weight: 9 lbs.
Height: 12.5 in. over handle
Width: 7.5 in. diameter
Flow Range: 4 - 7 gpm
Operating Pressure: 2,000 psi
Pressure Port Thread: 9/16 - 18 SAE O-Ring
Return Port Thread: 3/4 - 16 SAE O-Ring

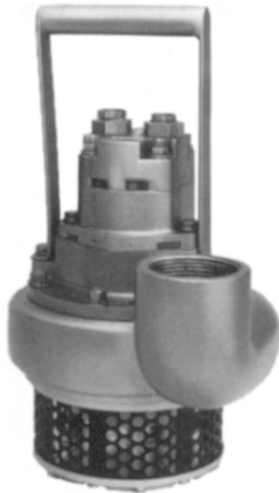

H4660B - SUBMERSIBLE PUMP

Open- and Closed-Center System
High impact strainer housing.
Up to 400 gpm.
Carrying Handle
2-1/2 in. NPT discharge.

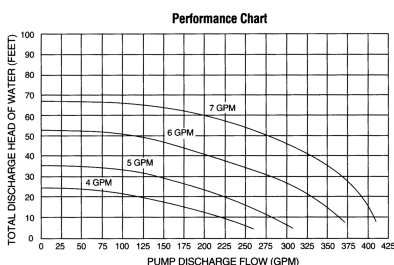

Specifications:

Capacity: Up to 400 gpm
Intake Port: 2-1/2 in. NPT
Discharge Port: 2-1/2 in. NPT
Strainer: 7 x 2.5 in.
Weight: 23.5 lbs.
Height: 16 in.
Width: 12 in. diameter
Flow Range: 4 - 8 gpm
Operating Pressure: 2,000 psi
Pressure Port Thread: 9/16 - 18 SAE O-Ring
Return Port Thread: 3/4 - 16 SAE O-Ring


TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193



Tooling solutions for the power utility industry.


H4670 - SUBMERSIBLE TRASH PUMP

- Open- and Closed-Center System
- Self-Priming abrasion resistant impeller pump can be run dry without damage.
- Up to 900 gpm.
- Replaceable wear plates.
- No clog impeller.
- Carrying handle.
- 4 in. NPT discharge - will pass 3 in. solids.
- Locking coupler for hose standard.

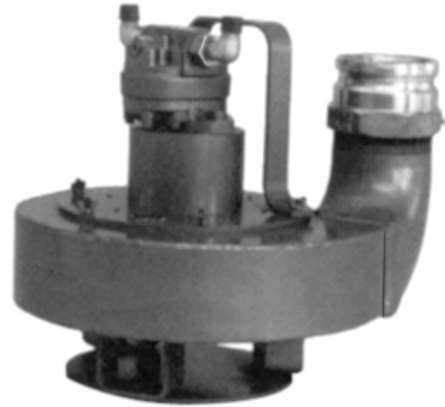

Specifications:

- Capacity:** Up to 900 gpm
- Intake Port:** 4 in. NPT
- Discharge Port:** 4 in. NPT
- Weight:** 59 lbs.
- Height:** 15.75 in.
- Width:** 14.5 in. diameter
- Flow Range:** 5 - 9 gpm
- Operating Pressure:** 2,000 psi
- Pressure Port Thread:** 1/2 in. NPTF
- Return Port Thread:** 1/2 in. NPTF

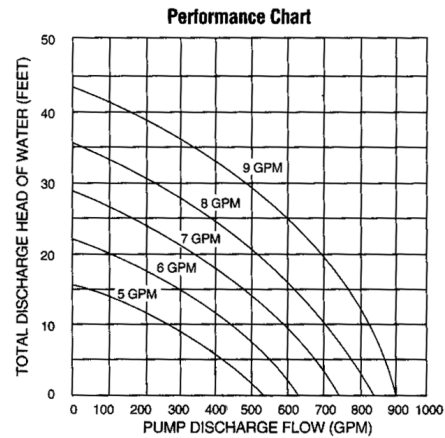

SUBMERSIBLE PUMP ACCESSORIES

Part	Description	For Use With	H4660B	H4665A	H4670
156340	Discharge Hose Assembly 2 in. Diameter x 25 ft.		x		
F024772	2 in. Cam Lock Coupling for Discharge Hose			x	
156339	2.5 in. Diameter x 25 ft. Discharge Hose Assembly		x		
F024775	2.5 in. Cam Lock Coupling for Discharge Hose		x		
154955	4 in. Diameter x 25 ft. Discharge Hose Assembly				x



**IF YOU DON'T SEE WHAT YOU NEED
CONTACT RELIABLE EQUIPMENT
800-966-3530**

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193