



Tooling solutions for the power utility industry.



45 LB. BREAKER - 12 in. whip hoses included. Lightweight breaker ideal for smaller jobs. Rechargeable bladder-type accumulator. Accepts standard steels. Interchangeable parts with other Greenlee Fairmont breakers. Cushioned grip handles. 7/8 in. x 3-1/4 in. hex tool steels (Except H4845A4)

- H4845A** 1-1/4 in. collar, Open-Center
- H4845A1** 1-1/4 in. collar, Closed-Center
- H4845A2** 1-5/8 in. collar, Open-Center
- H4845A4** 1 in. x 4-1/4 in. hex tool steels, Open-Center, European configuration,

Weight: 45 lb.
Length: 26 in.
Width: 17.5 in. across handles

SPECIFICATIONS:

Flow Range: 5 - 8 gpm
Operating Pressure: 1,000 - 2,000 psi
Pressure and Return Port Thread.: 3/4 - 16 SAE O-Ring (Tool), 1/2 NPTF (Hose End)
Blows Per Minute: 1,800 @ 6 gpm



65 LB. BREAKER

Designed to be the most powerful, reliable, medium weight breaker available. Feathering Trigger provides maximum control. Rechargeable Accumulator. Few moving parts for easy assembly/maintenance. Replaceable chuck bushing. Tie bolt design for strength and easy disassembly. Spring-loaded front head reduces tool sticking. Standard cushion grips, or **AVS™** Anti-Vibration System handle for reduced vibration feedback to the operator.

- HD5565-1 or HD5565-1AVS** 1-1/8" x 6" Hex Tool Steels
- HD5565-2 or HD5565-2AVS** 1-1/4" x 6" Hex Tool Steels

Weight: Standard 67 lb.
 AVS 75 lb.
Length: Standard 26 in.
 AVS 28 in.

SPECIFICATIONS:

Hydraulic System: Open-Center
Flow Range: 5-9 gpm
Operating Pressure: 1,000-2,000 psi
Blows Per Minute: 1,250 @ 8 gpm


TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193



Tooling solutions for the power utility industry.

90 LB. HEAVY-DUTY BREAKER

Feathering trigger provides maximum control.
 Rechargeable Accumulator.
 Few moving parts for easy assembly/maintenance.
 Spring-loaded front head to combat tool sticking.
 Tie bolt design for strength and easy disassembly.
 Replaceable chuck bushing.
 Standard cushion grips, or **AVS™** Anti-Vibration System handle for reduced vibration feedback to the operator.

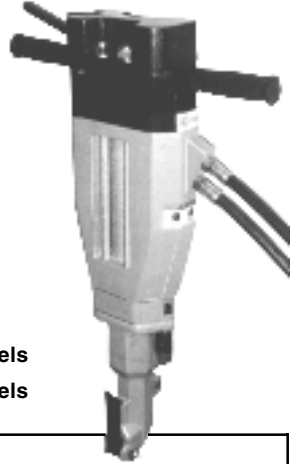

HD5590-1 or HD5590-1AVS 1-1/2 x 6 in. Hex Tool Steels

HD5590-2 or HD5590-2AVS 1-1/4 x 6 in. Hex Tool Steels

SPECIFICATIONS:

Hydraulic System:	Open-Center	Weight: Standard	82 lb.
Flow Range:	5-9 gpm	AVS	89 lb.
Operating Pressure:	1,000-2,000 psi	Length: Standard	27 in.
Blows Per Minute:	1,100 @ 8 gpm	AVS	29 in.

57 LB. ROTARY HAMMER

Open-Center System
 Drills holes up to 3 in. in rock or concrete.
 Built-in air/water clean-out valve to clean hole while drilling.
 3-way selector controls drill rotation: forward, neutral and reverse.
 Cushioned grip handles.



H48950-2 7/8 in. x 4-1/4 in. Hex Drive Star Drills

H48950-4 1 in. x 4-1/4 in. Hex Drive Star Drills

SPECIFICATIONS:

Drill Capacity:	3 in. holes max.	Weight:	57 lbs.
Drill Rotation:	Forward, neutral, reverse	Length:	26 in.
Flow Range:	7 - 10 gpm	Width:	17.5 in. (handles)
Operating Pressure:	1,000 - 2,000 psi		
Pressure Port and Return Thread:	3/4 -16 SAE O-Ring		
Blows Per Minute:	1,360 @ 10 gpm		

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193



BREAKER ACCESSORIES

PART	DESCRIPTION	H4845	HD5565-1 65-1AVS	HD5565-2 65-2AVS	HD5590 90-1AVS	HD5590-2 90-2AVS
F016769	Moil Point	x				
F016770K	3 in. Chisel	x				
F016773K	5 in. Clay Spade	x				
F018446	Moil Point 1-1/4 X 6 in.			x		x
F018447	3 in. Chisel 1-1/4 X 6 in.			x		x
F018448	5 in. Asphalt Cutter 1-1/4 X 6 in.			x		x
F018449	Clay Spade 1-1/4 X 6 in.			x		x
F018450	1-3/8 in. Chisel 1-1/4 X 6 in.			x		x
F018451	Moil Point 1-1/8 X 6 in.		x		x	
F018452	3 in. Chisel 1-1/8 X 6 in.		x		x	
F018453	5 in. Asphalt Cutter 1-1/8 X 6 in.		x		x	
F018454	Clay Spade 1-1/8 X 6 in.		x		x	
F018455	1-3/8 in. Chisel 1-1/8 X 6 in.		x		x	

GROUND ROD DRIVING

101724	5/8 - 11 Thread	x				
101725	3/4 - 10 Thread	x				
101948	Threadless Rod 1 1/16 in. I.D.	x				
113509	Threadless Rod 1 in. I.D.	x				
1137449	Threadless Rod 5/8 in. I.D.	x				

ACCESSORIES FOR CHARGING ACCUMULATORS

69292	Gauging Device	x				
92279	Charging Hose (Assembly)	x				
F020651	Adapter (Greer)	x				
F024368	Extension (Oil Air) (Accumulator Charging)	x				
49000	Closed Center Conv. Kit		x	x	x	x

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193