




Tooling solutions for the power utility industry.

90 LB. HEAVY-DUTY BREAKER

Feathering trigger provides maximum control.
 Rechargeable Accumulator.
 Few moving parts for easy assembly/maintenance.
 Spring-loaded front head to combat tool sticking.
 Tie bolt design for strength and easy disassembly.
 Replaceable chuck bushing.
 Standard cushion grips, or **AVS™** Anti-Vibration System handle for reduced vibration feedback to the operator.

HD5590-1 or HD5590-1AVS 1-1/2 x 6 in. Hex Tool Steels
HD5590-2 or HD5590-2AVS 1-1/4 x 6 in. Hex Tool Steels

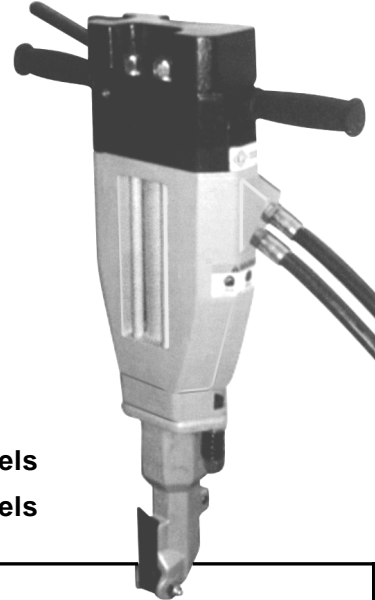

SPECIFICATIONS:

Hydraulic System:	Open-Center	Weight:	Standard	82 lb.
Flow Range:	5-9 gpm		AVS	89 lb.
Operating Pressure:	1,000-2,000 psi	Length:	Standard	27 in.
Blows Per Minute:	1,100 @ 8 gpm		AVS	29 in.

57 LB. ROTARY HAMMER

Open-Center System
 Drills holes up to 3 in. in rock or concrete.
 Built-in air/water clean-out valve to clean hole while drilling.
 3-way selector controls drill rotation: forward, neutral and reverse.
 Cushioned grip handles.

H48950-2 7/8 in. x 4-1/4 in. Hex Drive Star Drills
H48950-4 1 in. x 4-1/4 in. Hex Drive Star Drills



SPECIFICATIONS:

Drill Capacity:	3 in. holes max.	Weight:	57 lbs.
Drill Rotation:	Forward, neutral, reverse	Length:	26 in.
Flow Range:	7 - 10 gpm	Width:	17.5 in. (handles)
Operating Pressure:	1,000 - 2,000 psi		
Pressure Port and Return Thread:	3/4 -16 SAE O-Ring		
Blows Per Minute:	1,360 @ 10 gpm		

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193