




Tooling solutions for the power utility industry.

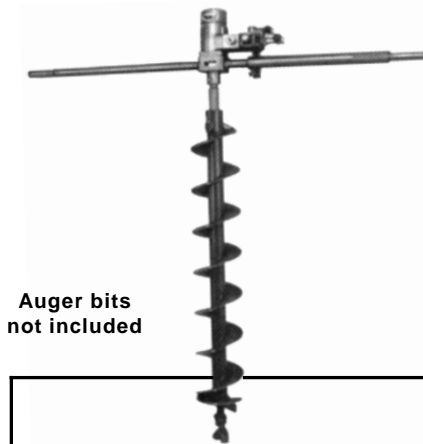

Auger bits
not included

POST HOLE AUGER

Portable, two-person, hand-held auger.
Drills holes up to 12 in. diameter
Automatic return to neutral.
On/Off twist grip.

H4610A Reversible, Open-Center System

H4610A1 Reversible, Closed Center

Specifications:

Weight 33 lbs.

Height 15.5"

Width 52" (Across Handle)

Flow 4 - 8 gpm

Capacity: 12 in. diameter holes

RPM: 120 rpm @ 6 gpm


Operating Pressure: 1,000 - 2,000 psi

Pressure Port Thread: 3/8 in. NPTF

Return Port Thread: 1/2 in. NPTF

POST HOLE AUGER ACCESSORIES

Part	Description	For Use With	H4660B	H4665A
F023678	Auger	6 in. x 41.5 in.	x	x
F023679	Auger	8 in. x 41.5 in.	x	x
F0R004225	Auger	10 in. x 41.5 in.	x	x
F023680	Auger	12 in. x 41.5 in.	x	x

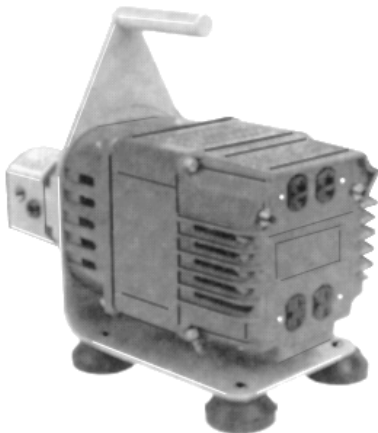

H66351 - PORTABLE ALTERNATOR

3,500 watts, 120 and 240 AC volt outlets,
60 HZ single Phase.

Open- and Closed-Center System

Instant electric power for lighting, heaters,
and other electronically driven equipment.

Operates off hydraulic systems with flow
rates from 8 - 12 gpm.

Circuit breaker protected.

Rugged gear motor.

Specifications:

Weight 63 lbs.

Height 14"

Width 8.5"

Flow Range: 8 - 12 gpm

System Pressure: 2,500 psi

Pressure Port Thread: 1/2 in. NPTF

Return Port Thread: 1/2 in. NPTF

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193