



Tooling solutions for the power utility industry.

WEBBING LANYARDS

Nylon or polyester webbing lanyards are economical, abrasion resistant, and easy to clean and store.

Standard lanyards are six (6) feet in length.

Available in any length, please specify.

SHOCK-ABSORBING LANYARDS

The lanyard is a true shock absorber/lanyard combination with a special shock-absorbing inner core material surrounded by a super-strong, H/D outer jacket that doubles as a back-up web lanyard.

Features a unique warning flag to indicate the unit has been involved in a fall and should be removed from service.

Available in lengths from 4 to 10 feet.

Standard lanyards are six feet in length.

216WLS - SIX-FOOT MANYARD

Shock-absorbing lanyard with two (2) plated locking snap hooks with 3/4" throat openings.

233WLS - MANYARD II LANYARDS

Stretches from 4 to 6 feet, offering greater maneuverability.

Features: Plated locking snap hook with 3/4" throat openings and nylon choke off loop.


8175 - TRAILING ROPE GRABS

Standard trailing rope grab constructed of stainless steel with a 5/8" rope tunnel.

Meets or exceeds OSHA, ANSI and CSA requirements.

AERIAL BUCKET BOOM BELT

No. 6404 Boom Belt for single units fit any style boom. Sliding Circle Dee Ring is compatible with No. 2990 lanyard snap. Quick and easy to attach in any position. Boom Belt is pulled up snugly to boom.

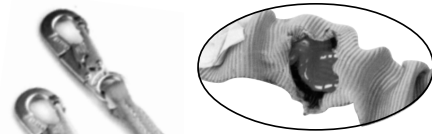


216WLS



233WLS



8175
Rope Grab

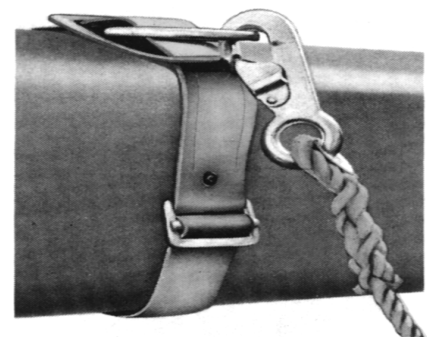

**IF YOU DON'T SEE WHAT YOU NEED
CONTACT RELIABLE EQUIPMENT
800-966-3530**

TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193