




RELIABLE EQUIPMENT & SERVICE CO., INC.

BAR & CHAIN COMBINATIONS
FROM 15" TO 20"

REL-HDS-20 20" HEAVY DUTY HYDRAULIC DIAMOND BLADE CHAIN SAW

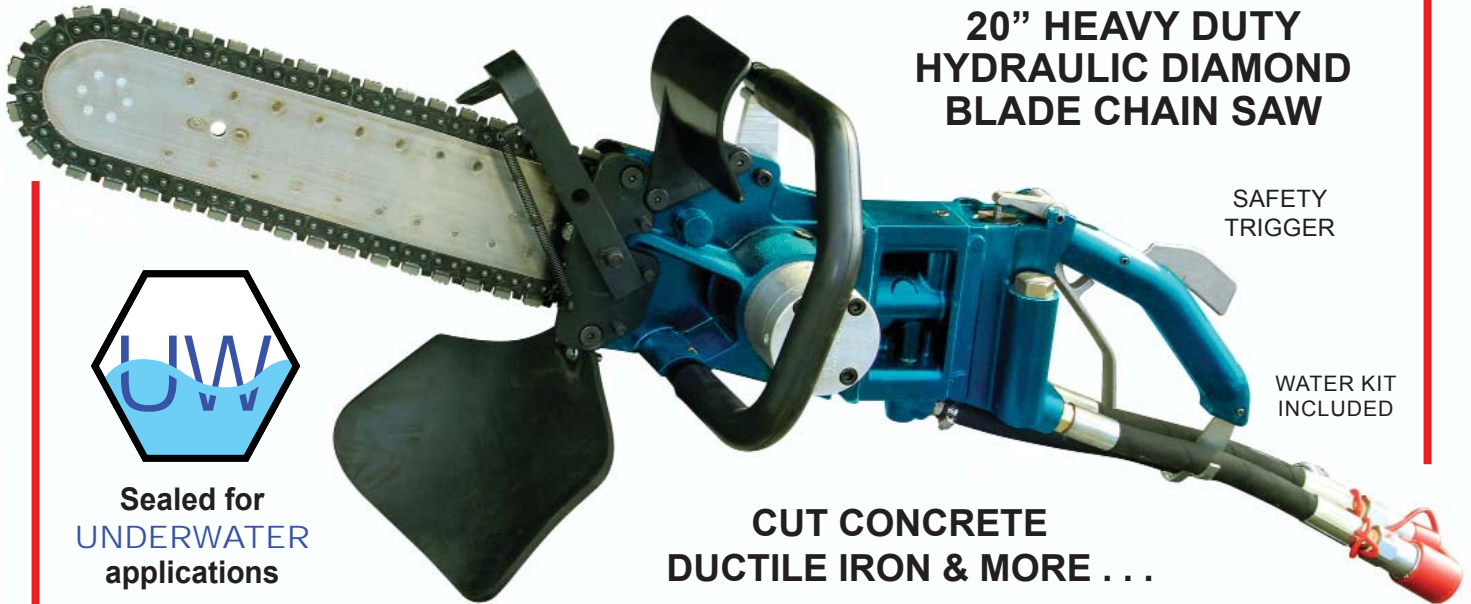

SAFETY
TRIGGER

WATER KIT
INCLUDED



Sealed for
UNDERWATER
applications

CUT CONCRETE
DUCTILE IRON & MORE . . .

GUARD

The REL-HDS-20 hydraulic chain saw has broad applications in underwater construction and deconstruction, as well as Municipal, D.O.T., and utility construction at the surface. The REL-HDS-20 has been designed to utilize Diamond Impregnated Chain to cut concrete, ductile iron, rebar reinforced concrete, and a variety of other substrate materials above and below the waters' surface.


A variety of bar and chain sizes and types help to adapt this tool for your application. Whether you are cutting a footer, foundation, or water main; Square off the end cut on a retaining wall, or dive in and plunge cut through a sea wall, the REL-HDS-20 will put the power to get the job done in the palm of your hand.

Capacity	15 - 20" (38-45 cm) Bar
Chain Type	3/8" Pitch - Diamond Impregnated
Pressure	1,000 to 2,000 psi 70 to 140 bar
Flow Range	7 - 9 gpm / 26 - 34 lpm
Optimum Flow	8 gpm / 30 lpm
System	Open Center
Lubrication/Cooling	Internal Water Distribution Porting
Length: 35" - 43" / 89-110 cm (varies w/ chain & bar selection)	
Width: 9.5" / 25 cm at handle	
Tool Weight: 29 lbs./13 kg (varies w/ chain & bar selection)	
The Bar and Chain are NOT included with saw. Bar and Chain options will vary to meet the requirements of your application. Consult your Reliable representative.	



301 Ivyland Road • Warminster, PA 18974
Phone: 800-966-3530 • Fax: 215-357-9193

Visit us on the web at www.Reliable-Equip.com



RELIABLE EQUIPMENT & SERVICE CO., INC.



Sealed for **UNDERWATER** applications

Shown with optional **REL-370-6FP** Couplers

Water Attachment Kit Included



METAL or MASONRY

REL-COS-14 14" Hydraulic Cut-Off Saw

Model	REL-CO-14 Hyd. Cut-Off Saw
Capacity	up to 14" Circular Blade/Wheel
Pressure	1,500 - 2,000 psi 105 - 140 bar
Flow Range	7 - 9 gpm / 26 - 34 lpm
Optimum Flow	8 gpm / 30 lpm (2,700 rpm)
Speed	4,700 rpm (Max.)
Porting	8 SAE O-ring
Connector	3/8" adaptors (x2)
System Type	Open Center, HTMA Type II
Weight	20 lbs. / 9 kg
Length	21 inch / 53 cm
Width	11 inch / 28 cm

A variety of blades and abrasive wheels, allow the **REL-COS-14** to cut Metal, Masonry and More.

The saw rotates counter clockwise to direct waste away from the operator. Cut dry or use the included water attachment kit.

The **REL-COS-14** will compliment any Utility or D.O.T. inventory.

 **RELIABLE EQUIPMENT & SERVICE CO., INC.**

301 Ivyland Road • Warminster, PA 18974
Phone: 800-966-3530 • Fax: 215-357-0363

www.Reliable-Equip.com