





*Tooling solutions for the power utility industry.*

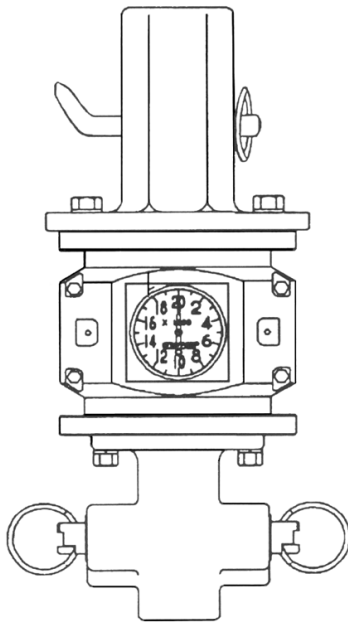

**C303-1340**  
Torque Indicator

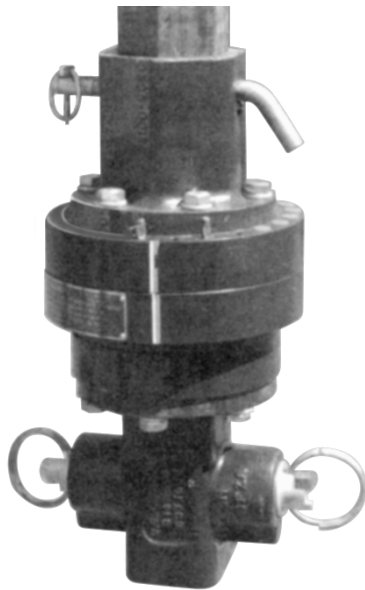

**C303-0044**  
Torque Limiter

## CHANCE<sup>®</sup> TORQUE INDICATORS

Using Chance Torque Indicators, you can install screw anchors to a pre-determined torque value which gives a positive indication of anchor holding capacity in any type soil. These tools also help prevent excessive torsional loading which could cause damage to the anchor and/or other anchor tools during installation. The Indicators are mounted between the Kelly bar adapter and drive wrench or locking dog assembly.

### C303-1340 - MECHANICAL TORQUE INDICATOR (For Installing torques up to 20,000 ft.-lb.)

**Offers:** Easy-to-read dial, giving the operator a direct read-out of installation torque at all times.

*No Shear pins to replace.*

Has six 1/2"-13 tapped holds on a 5-1/4" bolt circle and twelve 5/8"-11 tapped holes on a 7-5/8" bolt circle, each end.

Torque Ratings	Use Bolt Circle
* 0-10,000 Ft.-Lb.	(6) 1/2" on 5-1/4" B.C.
* 0-15,000 Ft.-Lb.	(6) 5/8" on 7-5/8" B.C.
* 0-20,000 Ft.-Lb.	(12) 5/8" on 7-5/8" B.C.

\* Do not exceed torque rating on tooling.

**NOTE:** Mechanical Torque Indicator is not recommended in heavy-rocky soil applications.

### C303-0044 - SHEAR PIN TORQUE LIMITER (For Installing torques up to 10,000 ft.-lb.)

**Offers:** Protection for anchors and installing tools by disconnecting the power source from drive tools. Usable in very rocky soil.

Durable - does not require special storage or handling. Has six 1/2" - 13 tapped holes on a 5-1/4" bolt circle, both ends.

## ORDERING INFORMATION

Part No.	Description	Wt., Ea.
C303-0044	Torque Limiter	54 Lb.
*C303-0045	(1ctn.) Shear Pins (Approx. 1,700 pins)	50 Lb.



**IF YOU DON'T SEE WHAT YOU NEED  
CONTACT RELIABLE EQUIPMENT  
800-966-3530**

**TO ORDER CALL: 800-966-3530 OR FAX: 215-357-9193**