


RELIABLE EQUIPMENT & SERVICE CO., INC.

REL-750DM

6.2 TON MANUAL HYDRAULIC DIELESS CRIMPING TOOL

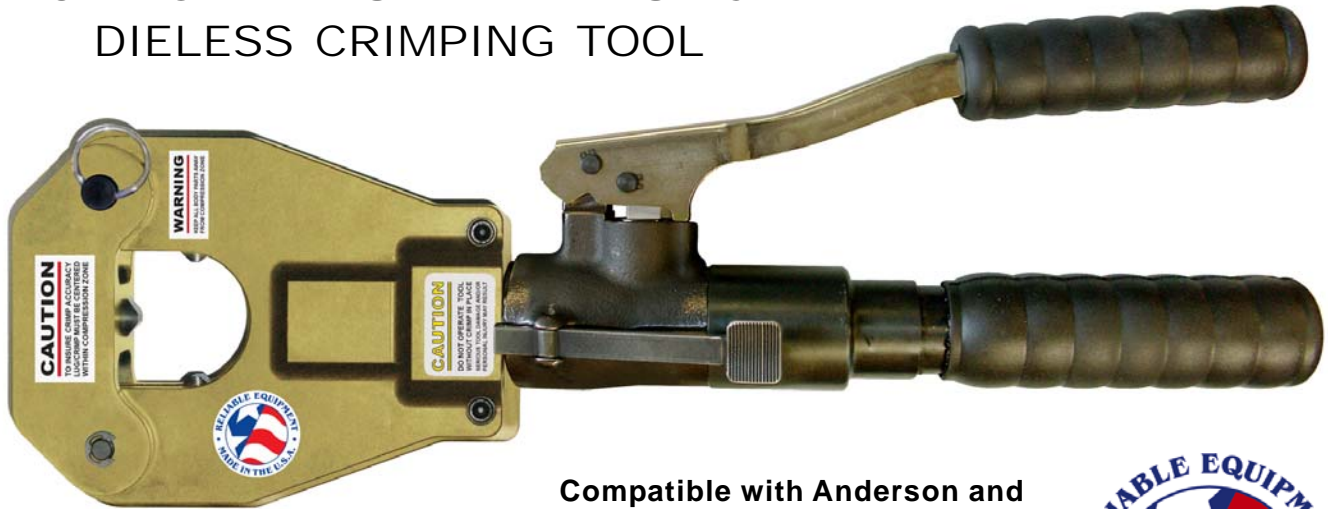

Compatible with Anderson and equivalent dieless connectors.



This **REL-750DM** compression head has been designed to crimp Anderson type and equivalent connectors manufactured to ANSI C119.4.

This model features a connector range up to 750 MCM and a 1.5 inch jaw opening providing ample space for easy die positioning. A two-stage advance piston. The first stage brings the crimp to the connector quickly, while the second stage provides the power to make the connection. The flip top design and 180° swivel head permit simple tool positioning, while the pull-pin closure will provide a safe positive lock.

FEATURES:

- 6.2 Ton output**
- Compatible with Anderson & equivalent dieless connectors.**
- Flip top design and rotating head provide easy placement around crimp.**
- Two stage pumping system**
- Eliminate the need for dies under acceptable dieless applications.**
- Connector range from #10 to 750 MCM**
- Copper and Aluminum.**
- Carrying case included.**

SPECIFICATIONS

Length 19.5"	Width 7.5"	Weight 9.5 lbs.
Pressure	6.2 tons @ 10,000 psi (manual)	
Capacity	Dieless connector range from # 10 to 750 MCM CU & AL	



RELIABLE EQUIPMENT & SERVICE CO., INC.

301 Ivyland Road • Warminster, PA 18974
Phone: 800-966-3530 • Fax: 215-357-9193
Visit us on the web at www.Reliable-Equip.com